
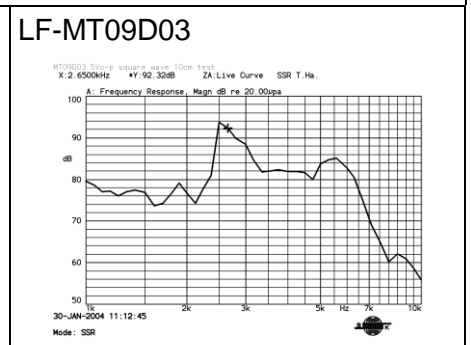
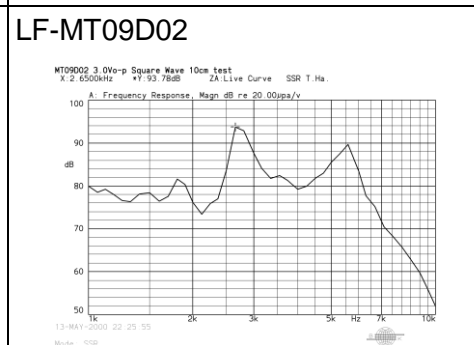
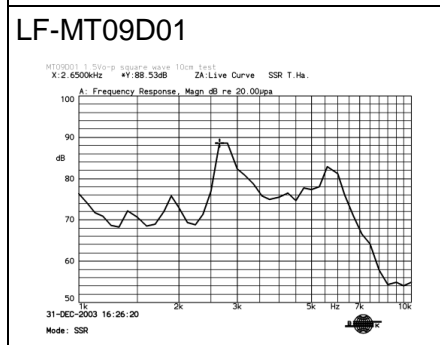


Part No. 型 號	LF-MT09C01	LF-MT09C02	LF-MT09C03
Rated Voltage (Vo-p) 額定電壓	1.5	3	5
Operating Voltage (Vo-p) 工作電壓	1~2	2~4	4~6
Current Consumption (mA) 消耗電流	80 max	70 max	70 max
Coil Resistance (Ω) 直流阻抗	5.0±2	25±2	40±4
Sound Pressure Level at 10cm 輸出音壓	80dB min.	80dB min.	85dB min.
Resonant Frequency (Hz) 諧振頻率	2,730	2,730	2,730
Operating Temperature (°C) 工作溫度	-20~+60	-20~+60	-20~+70
Weight 重 量	1.0gms.	1.0gms.	1.0gms.

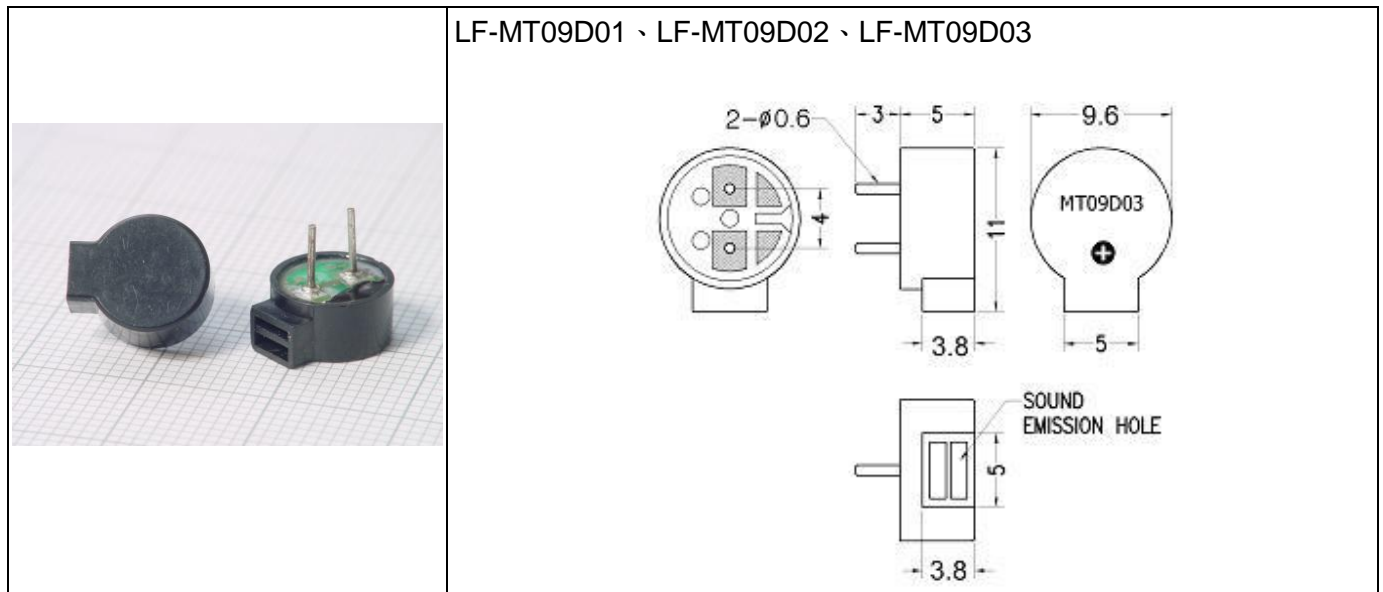

Part No. 重量	LF-MT09D01	LF-MT09D02	LF-MT09D03
Rated Voltage (V _{o-p}) 額定電壓	1.5	3	5
Operating Voltage (V _{o-p}) 工作電壓	1~2	2~4	4~6
Current Consumption (mA) 消耗電流	80 max	80 max	100 max
Coil Resistance (Ω) 直流阻抗	5.5 \pm 2	25 \pm 2	40 \pm 6
Sound Pressure Level at 10cm 輸出音壓	80dB min.	83dB min.	85dB min.
Resonant Frequency (Hz) 諧振頻率	2,730	2,730	2,730
Operating Temperature ($^{\circ}$ C) 工作溫度	-20~+60	-20~+60	-20~+60
Weight 重量	0.9gms.	0.9gms.	0.9gms.